



Technical Standard - TS132

Low Voltage Embedded Generation Connection Technical Requirements –
Capacity above 30kVA

Published: 22 September 2025

Revision Notice:

Date	Details	Author	Authorised
6 May 2022	New document for LV EG above 30kVA. Supersedes TS130 & TS131	A. Lee	M. Napolitano
22 Sept 2025	Updated Disclaimer updated. Definition for central protection deleted and interface protection added. Standards updated. Updated to clauses to incorporate changes to AS/NZS4777.1 and AS/NZS4777.2.	A. Lee	A. Walsh

SA Power Networks:

SA Power Networks, ABN 13 332 330 749, a partnership of:

- Spark Infrastructure SA (No.1) Pty Ltd, ABN 54 091 142 380
- Spark Infrastructure SA (No.2) Pty Ltd, ABN 19 091 143 038
- Spark Infrastructure SA (No.3) Pty Ltd, ABN 50 091 142 362
- each incorporated in Australia
- CKI Utilities Development Limited, ABN 65 090 718 880
- PAI Utilities Development Limited, ABN 82 090 718 951
- each incorporated in The Bahamas

1 Anzac Highway, Keswick, South Australia, 5035.

SA Power Networks’ Disclaimer:

1. This document is only to be used for the purposes described within it. SA Power Networks makes no representations about its suitability for any other purposes.
2. This standard sets out the minimum standards which must be complied with. Contractors and their workers, holders of network access permits and others required to comply with this document must have their own safety systems, procedures and requirements and where the contractor has entered into a contract or agreed to certain terms and conditions, it must also comply with those binding legal obligations
3. Further, the purpose of this document is to set out standards with which equipment connected to the SA Power Networks electricity distribution network must comply to facilitate the safe and effective operation of the distribution network. However, SA Power Networks makes no representation of any nature that the fact equipment complies with these standards means that the equipment will be suitable for a particular customer’s or generator’s needs and electricity requirements. Each customer (or generator if you are a generator) must seek its own advice as to these matters from other suitably qualified professionals and is solely responsible for ensuring any equipment installed at its premises is suitable for the use the customer (or generator) wishes to make of any such equipment.
4. Nothing in this standard constitutes an endorsement of any third-party product or service. Each user of this manual must make their own assessment of the suitability for their needs of third-party products and services and seek appropriate professional advice.
5. This standard is subject to change from time to time. Users of it should ensure they have the most up to date version.

SA Power Networks Copyright©2025:

This publication is copyright protected. SA Power Networks reserves to itself all rights in such material. You shall not reproduce any content of this document by any process without first obtaining the SA Power Networks’ permission, except as permitted under the Copyright Act 1968.

All rights reserved.

Contents

Figures	5
Tables.....	5
1. Introduction	6
2. Definitions and Abbreviations	7
2.1 Definitions.....	7
2.2 Abbreviations.....	10
2.3 Terminology.....	11
3. Relevant Rules, Regulations, Standards and Codes.....	12
3.1 Standards and Codes	12
3.2 Legislation and Regulations	14
4. Technical Requirements	15
4.1 Labelling and Signage.....	15
4.2 Maximum System Capacity.....	15
4.3 Generation Control	16
4.3.1 Export Limits at Connection Point	16
4.3.2 Site Generation Limit Downstream of Connection Point	16
4.4 Inverter Energy System	16
4.4.1 Electric Vehicle Supply Equipment	17
4.4.2 Inverter Power Sharing Device (IPSD)	17
4.4.3 Independent Supply IES.....	17
4.4.4 Like for Like Warranty Replacements.....	17
4.5 Energy Storage System (ESS)	17
4.6 Reactive and Active Power Control	18
4.6.1 Reactive Power Control	18
4.6.1.1 <i>Reactive Power Control Requirements for sites with both Generation and Load.....</i>	<i>18</i>
4.6.2 Active Power Control.....	18
4.7 Network Connection and Isolation	19
4.7.1 Back-up Supply Including Generators	19
4.8 Earthing.....	19
4.9 Protection	19
4.9.1 Inverter Integrated Protection	19
4.9.1.1 <i>Passive Anti-islanding Voltage and Frequency Limits</i>	<i>19</i>
4.9.1.2 <i>Active Anti-Islanding Protection.....</i>	<i>20</i>
4.9.1.3 <i>Voltage Ride Through.....</i>	<i>20</i>
4.9.2 Interface Protection.....	Error! Bookmark not defined.
4.9.2.1 <i>Passive Anti-Islanding Protection.....</i>	<i>23</i>

4.9.2.1.1	<i>Voltage and frequency Limits – EG IES</i>	23
4.9.2.1.2	<i>Rate of change of frequency limits – EG IES</i>	23
4.9.2.1.3	<i>Voltage and frequency Limits – EG Non-IES</i>	23
4.9.2.1.4	<i>Rate of change of frequency limits – EG Non-IES</i>	23
4.9.2.2	<i>Overcurrent Facility, Overcurrent Grid Fault and Earth Fault Protections</i>	24
4.9.2.3	<i>Directional Power Protection</i>	24
4.9.2.4	<i>Seamless Transfer</i>	25
4.9.2.5	<i>Phase Balance Protection</i>	26
4.9.2.6	<i>Inter-trip</i>	26
4.9.2.7	<i>DC System or UPS Integration Protection</i>	27
4.9.2.8	<i>Fail-safe Tripping</i>	27
4.9.3	<i>Interlocking</i>	27
4.9.4	<i>Synchronisation</i>	27
4.9.5	<i>Additional requirements for LV EG Non-IES</i>	27
4.10	<i>Operating Voltage and Frequency</i>	27
4.11	<i>Revenue Metering</i>	28
4.12	<i>Power Quality</i>	28
4.12.1	<i>Quality of Supply</i>	28
4.12.1.1	<i>Voltage Fluctuation and Flicker</i>	28
4.12.1.2	<i>Ramp Rate</i>	28
4.12.1.3	<i>Harmonics</i>	28
4.12.1.4	<i>Voltage Unbalance</i>	29
4.12.2	<i>LV EG IES Power Quality Response Modes</i>	29
4.12.3	<i>LV EG Non-IES Synchronous Power Quality</i>	30
4.12.4	<i>Volt-watt response for inverters with energy storage when charging.</i>	30
4.13	<i>Communication Systems</i>	30
4.14	<i>Data and information</i>	30
4.14.1	<i>Static Data and Information</i>	30
4.14.2	<i>Dynamic Data and Information</i>	30
4.15	<i>Technical Studies</i>	31
4.15.1	<i>Modelling Data</i>	31
4.15.2	<i>Fault Levels</i>	31
4.15.2.1	<i>Generating System Fault Level Contributions</i>	31
4.15.2.2	<i>Specific Requirements for Areas of Constraint</i>	31
4.15.2.3	<i>SA Power Networks’ Ultimate Network Fault Levels</i>	32
5.	<i>Fees and Charges</i>	32
6.	<i>Testing and Commissioning</i>	32
6.1	<i>SA Power Networks Site Visit Requirements</i>	32
6.2	<i>Commissioning Witnessing Checklist Requirements</i>	33

Pre-Connection Commissioning Documentation.....	33
6.4 Protection Compliance Testing.....	34
6.5 On-Line Demonstration	36
6.6 Power Quality Monitoring	37
7. Operations and Maintenance	38
7.1 Joint Operating Protocols	38
7.2 Operating Procedures.....	39
7.2.1 Additional Operating Protocol Requirements for Inter-trip Interface Signals	39
7.3 Compliance Monitoring and Maintenance	40
7.3.1 Frequency of Testing	40
7.4 Notice of Alteration to Approved Installation	41
Appendices	42
A. Deviations from the National DER Connection Guidelines.....	42
B. Typical LV Connection Arrangement.....	43
C. Model Connection Agreement	44
D. Static Data and information	44

Figures

Figure 1: SLD Typical LV Connection Greater than 200kVA.....43

Tables

Table 1: Maximum System Capacity 15

Table 2: LV Inverter Passive Anti-islanding Voltage & Frequency Limit Values 20

Table 3: LV Inverter Passive Anti-islanding Voltage as % & Frequency Limit Values 20

Table 4: Interface Protection Requirements 22

Table 5: Interface Protection protective functions and default set points 23

Table 6: LV EG Non-IES Interface Protection Voltage & Frequency Limit Values 23

Table 7: Directional Power Protection Requirements 24

Table 8: Generating System Voltage Unbalance Requirements 29

Table 9: Mandatory: Volt-VAr Response Mode for AS/NZS 4777 Compliant Inverters..... 29

Table 10: Mandatory: Volt-Watt Response Mode for AS/NZS 4777 Compliant Inverters..... 29

Table 11: Sustained Operation for Voltage Variations 29

Table 12 . Volt-watt response set-point values for multiple mode inverters with energy storage when charging 30

Table 13: Technical Studies Required for LV EG Connections 31

Table 14: Protection and Control Compliance Test Requirements..... 35

Table 15: Testing and Commissioning Requirements for LV EG Connections 36

Table 16: Indicative On-Line Demonstration Requirements 37

Table 17: Power Quality Measurement Requirements..... 38

1. Introduction

This technical standard provides designers, contractors, and consultants with an understanding of the technical requirements for low voltage (LV) embedded generation (EG) connections with a total nameplate capacity above 30kVA, which are to be connected to SA Power Networks' distribution network.

This document shall be read in conjunction with [NICC270: Connection of Medium and Large Embedded Generation Greater than 30kVA](#) and [SA Power Networks' Service and Installation Rules \(SIR\)](#), which are available at (www.sapowernetworks.com.au), and the installation shall be in accordance with the relevant AS/NZS standards (refer section 3).

For small EG system capacity not exceeding 30kVA, refer to [TS129](#) and for a high voltage (HV) EG system connected to the network, refer to [TS133](#).

This standard does not detail SA Power Networks' or the generator's obligatory requirements to comply with Essential Services Commission of SA (ESCOSA) - Electricity Distribution Code (EDC), Electricity Metering Code (EMTC), licensing, Australian Energy Market Operator (AEMO) and National Electricity Rules (NER). It is the responsibility of the customer, to ensure that their installation is compliant with these requirements, and to ensure all required third party approvals and/or licenses are obtained.

The technical requirements outlined in this technical standard do not apply to systems that are connected via a compliant Open Transition Transfer Switch (OTTS) and do not operate in parallel with the network (e.g. back-up generator).

The customer is advised **not** to procure or commit to procure any land or equipment associated with their proposed generating system until receipt of an engineering report from SA Power Networks.

TS132 sets out the minimum technical requirements for LV connected EG. Any additional site-specific requirements will supersede these minimum requirements and will be specified in the Engineering Report.

2. Definitions and Abbreviations

2.1 Definitions

Closed Transition Transfer Switch	An electrical switch that provides a make-before-break transfer sequence.
Cluster	The aggregation of generating units on the same title or adjacent titles of land when they are owned or operated by customers that share an interest in the other generator(s), and/or the land, regardless of the number of NMIs or connection points.
Connection Point	As per Electricity (General) Regulations 2012: A connection point to a transmission or distribution network. For this document, connection point also has the same meaning as point of supply as defined in AS/NZS 3000. The point of supply established between SA Power Networks and the customer.
Customer	A person who engages in the activity of purchasing electricity supplied through the distribution network to a connection point and is registered by AEMO as a customer under chapter 2 of the NER.
Consumer Energy Resources	Power generation or energy storage units that are connected directly to the distribution network.
Distribution Network	References to distribution network means the network poles, wires, underground cables, transformers, substations, etc, operated by SA Power Networks, which transports electricity to and from a customer's connection point.
Earth Potential Rise	Earth potential rise (EPR) occurs when large current flows to earth through an earth grid impedance. The potential relative to a distant point on the earth is highest at the point where current enters the ground and decreases with distance from the source.
Electricity Distribution Code	The Electricity Distribution Code made by ESCOSA pursuant to Section 28 of the Essential Services Commission Act 2002.
Embedded Generating Unit	A generating unit connected within a distribution network and not having direct access to a transmission network.
Embedded Generator	A customer who owns, operates, or controls an embedded generating unit.
Energy Storage Unit	Plant that is able to both, store electricity from, and discharge electricity to, units within the same generating system and/or distribution network (ie act as both a load and a generating unit)
Energy Storage System	A system comprising one or more energy storage units
Generation Dispatch Limit	A real power output limit value sent via a SCADA signal by the DNSP to be applied at the individual generating unit terminals.
Generating System	All embedded generating units and the associated control and protection equipment that is located on the customer's side of the connection point.
Generating Unit	The plant used in the production of electricity and all related equipment essential to its functioning as a single entity.

Generator	A person/entity who engages in the activity of owning, controlling, or operating a generating system that supplies electricity to, or who otherwise supplies electricity to, a transmission or distribution network.
Grid	Portion of the electrical distribution system that is operated by an electrical distributor. Note: An alternative term for grid is electricity distribution network.
High Voltage	Voltage exceeding low voltage
Inter-trip	An anti-islanding protection scheme that is operated by the distribution network service provider to disconnect the embedded generating system when a network fault occurs.
Interface Protection	The protection relay functions that open the disconnection device of an inverter energy system, and prevent its closure, as appropriate in the case of: <ul style="list-style-type: none"> • A fault on the grid; • An unintentional islanding situation; or • Voltage and frequency being outside the continuous operating range
Inverter	The device that may form part of the generating system which uses semiconductor / power electronics devices to convert direct current to alternating current.
Inverter Energy System	A system consisting of one or more inverters that operate by converting direct current to alternating current. In the context of system capacity, this definition includes the capacity of ac coupled energy storage systems.
Large Embedded Generation	IES EG installations with a combined nameplate rating greater than 500 kVA
Low Voltage	Voltage exceeding 50V ac or 120V ripple free dc and not exceeding 1,000V ac or 1,500V dc
Model Connection Agreement	A document that is a model standing offer, or an equivalent document that may or may not be approved by the Australian Energy Regulator, and that is used to provide a basis for low voltage or high voltage embedded generation connection services. The document contains (amongst other things) details of the standard safety and technical requirements to be complied with by the customer.
Multiple Mode Inverter	Inverter that operates in more than one mode, for example having grid-interactive functionality when grid voltage is present and in stand-alone mode when the grid is de-energised or disconnected

Nameplate Rating	The maximum continuous output or consumption in MW of an item of equipment as specified by the manufacturer, or as subsequently modified. Where the rating of an item of plant is specified by the manufacturer in MVA and not MW, the nameplate rating is determined by converting the manufacturer's rating in MVA to the rating in MW by applying a conversion factor of 1.
National Electricity Rules	The rules as defined in the National Electricity Law as set out in the Schedule to the National Electricity Act 1996 (SA).
Net Export Limit	A real power export limit value sent via a SCADA signal by the DNSP to be applied at the proposed generating system's connection point.
Net Import Limit	A real power import limit value sent via a SCADA signal by the DNSP to be applied at the proposed generating system's connection point.
Non-inverter Energy System	System that does not include an inverter ie rotating generators
Open Transition Transfer Switch	An electrical switch that provides a break-before-make transfer sequence.
Point of Common Coupling	The location at which the impact of the generating system on the network will be assessed.
Photovoltaic	The generation of electrical power by converting solar radiation into direct current electricity.
Rate of Change of Frequency	An islanding detection method for decentralised generation units
Small Embedded Generation	A single phase or three phase inverter connected embedded generation system up to 30kVA.
System Capacity	Nameplate ratings of the inverter energy system or non-inverter energy systems, measured in VA
Supply	The delivery of electricity.
Total System Capacity	Sum of the nameplate ratings of the inverter energy systems or non-inverter energy systems comprising the embedded generation connection, measured in VA
Transmission Network	Network operated by ElectraNet.
Uninterruptible Power Supply	A device that provides battery backup when the electrical power fails or drops to an unacceptable voltage level.
Voltage Unbalance	In a three-phase system, voltage unbalance takes place when the magnitudes of phase or line voltages are different and the phase angles differ from the balanced conditions, or both.

2.2 Abbreviations

AEMC	Australian Energy Market Commission
AEMO	Australian Energy Market Operator Limited (ACN 072 010 327)
AER	Australian Energy Regulator
AS/NZS	A jointly developed Australian and New Zealand Standard
AS	Australian Standard
BESS	Battery Energy Storage System
CB	Circuit Breaker
CBD	Central Business District
CT	Current Transformer
CTTS	Closed Transition Transfer Switch
CEC	Clean Energy Council
CER	Consumer Energy Resources
DERMS	Distributed Energy Resource Management System
DNSP	Distribution Network Service Provider
EDC	Electricity Distribution Code
EG	Embedded Generation or Embedded Generating
EMTC	Electricity Metering Code (ESCOSA)
ENA	Energy Networks Australia
ESCOSA	Essential Services Commission of South Australia
ESS	Energy Storage System
EV	Electric Vehicle
FCAS	Frequency Control Ancillary Services
GDL	Generation Dispatch Limit
HV	High Voltage
IEC	International Electrotechnical Commission
IES	Inverter Energy System
IPSD	Inverter Power Sharing Device
IPU	Interface Protection Unit
LV	Low Voltage
MMI	Multiple Mode Inverter
MSB	Main Switchboard
NEL	Net Export Limit
NER	National Electricity Rules

NEM	National Electricity Market
NIL	Net Import Limit
NMI	National Meter Identifier
NOC	SA Power Networks' Network Operations Centre
OLTC	On-load Tap Changer
OTTS	Open Transition Transfer Switch
PCC	Point of Common Coupling
PLC	Programmable Logic Controller
PV	Photovoltaic
ROCOF	Rate of change of frequency
RTU	Remote Telemetry Unit (Also known as 'Remote Terminal Unit' or 'Remote Telecontrol Unit')
SCADA	Supervisory Control and Data Acquisition
SIR	Service & Installation Rules
SLD	Single Line Diagram
SVG	Static VAr Generator
SWER	Single Wire Earth Return
TNSP	Transmission Network Service Provider
UPS	Uninterruptible Power Supply
VDRT	Voltage Disturbance Ride Through
VT	Voltage Transformer

2.3 Terminology

May	Indicates a requirement that is not mandatory but can be imposed on the customer as deemed appropriate by SA Power Networks.
Must	Indicates a mandatory requirement.
Shall	Indicates a mandatory requirement.
Should	Indicates a recommendation that will not be mandatory but can be imposed on the customer as deemed appropriate by SA Power Networks.
Suitable (or Suitably):	To the satisfaction of the relevant SA Power Networks Manager.

3. Relevant Rules, Regulations, Standards and Codes

3.1 Standards and Codes

The following listed documents are for additional information and other documentation may be required on a project specific basis. Please Note: It is the responsibility of the installer to ensure you have complied with all applicable, SA Legislative Regulations (under Acts), ESCOSA/ENA/AEMC/IEC documentations, relevant AS/NZS standards, the SA Power Networks publications, and you have ensured their current publications, before implementing them.

Standards Australia Publications:

AS 1319	1994	Safety Signs for the Occupational Environment
AS 1768	2021	Lightning protection
AS 2067	2016	Substations and high voltage installations exceeding 1 kV a.c.
AS 2467	2008	Maintenance of Electrical Switchgear
AS/NZS 3000	2018	Electrical Installations (known as the wiring rules)
AS/NZS 3010	2017	Electrical Installations - Generating sets
AS 3011.1	2019	Electrical Installations – Secondary batteries installed in buildings Vented cells
AS 3011.2	2019	Electrical Installations – Secondary batteries installed in buildings Sealed cells
AS/NZS 3017	2022	Electrical installations - Testing User Guides
AS/NZS 3100	2022	Approval and test specification - General requirements for electrical equipment
AS/NZS 3835.1	2006	Earth Potential Rise - Protection of Telecommunications Network Users, Personnel and Plant - Code of practice
AS/NZS 3835.2	2006	Earth Potential Rise - Protection of Telecommunications Network Users, Personnel and Plant - Application guide
AS/NZS 4777.1	2024	Grid connection of energy systems via inverters - Installation requirements
AS/NZS 4777.2	2020(A md 2024)	Grid connection of energy systems via inverters - Inverter requirements
AS/NZS 5033	2021	Installation and safety requirements for photovoltaic (PV) arrays
AS/NZS 5139	2019	Electrical Installations - Safety of Battery Systems for Use with Power Conversion Equipment
AS 5577	2013	Electricity network safety management
AS 60034.1	2023	Rotating Electrical Machines – Rating and Performance
AS 60038	2022	Standard voltages
AS 60068.1	2023	Environmental testing - General and Guidance
AS 60529	2004	Degrees of Protection Provided by Enclosures (IP Code)
AS/NZS 60947.1	2021	Low-voltage switchgear and controlgear – Part 1: General Rules
AS/NZS 61000.1.1	2000	Electromagnetic compatibility (EMC) - General - Application and interpretation of fundamental definitions and terms
AS/NZS 61000.4.30	2023	Electromagnetic compatibility (EMC) – Testing and Measurement Techniques – Power Quality Measurement Methods
AS/NZS 61439.1	2016	Low-voltage switchgear and controlgear assemblies – General rules
AS 62040.1	2019	Uninterruptible power systems (UPS)

		Part 1: Safety requirements
IEC 62109-3	2020	Safety of power converters for use in photovoltaic power systems
		Part 3: Particular requirements for electronic devices in combination with photovoltaic elements
AS/NZS IEC 62116	2020	Utility-interconnected Photovoltaic Inverters – Test Procedure of Islanding Prevention Measures
IEC		
IEC 60071-1	2019	Insulation co-ordination – Part1: Definitions, principles and rules
IEC 60255-12	1980	Electrical Relays – Directional relays and power relays with two input energizing quantities
IEC 60255-26	2023	Electrical relays – Part 26: Electromagnetic compatibility requirements
IEC 60255-27	2023	Measuring relays and protection equipment – Part 27: Product safety requirements
IEC 60255-127	2010	Measuring relays and protection equipment – Part 127: Functional requirements for over/under voltage protection
IEC 61727	2004	Photovoltaic (PV) systems – Characteristics of the utility interface
IEC 61851-1	2017	Electric vehicle conductive charging system – Part 1: General requirements
IEC 62109-1	2010	Safety of power converters for use in photovoltaic power systems Part 1: General requirements
IEC 62109-2	2011	Safety of power converters for use in photovoltaic power systems Part 2: Particular requirements for inverters
ENA:		
ENA DOC-040	2019	Technical Guidelines for Low Voltage EG Connections

SA Power Networks Documents:

- Manual 14: Safety, Reliability, Maintenance & Technical Management Plan
- Manual 18: SA Power Networks Connections and Ancillary Network Services
- Manual 32: Service and Installation Rules
- Technical Standards & NICC Brochures, in particular:
 - NICC 270: Connection of Medium and Large Embedded Generation Greater than 30kVA
 - TS129: Low Voltage EG Connections not exceeding 30kVA
 - TS133: High Voltage EG Connections Technical Requirements
 - TS134: Communication Systems (inc. SCADA) for Embedded Generation

3.2 Legislation and Regulations

This section provides a list of the relevant legislation and regulations which shall apply to the design, manufacture, installation, testing and commissioning, and operations and maintenance of all plant and equipment for LV EG connections to the distribution network.

In an event where there is any inconsistency between legislation and regulations and these technical requirements, the legislation and regulations shall prevail.

- Electricity Act 1996
- Electricity (General) Regulations 2012
- National Electricity Rules
- Electricity Distribution Code (ESCOSA)
- Work Health and Safety Act 2012
- Work Health and Safety Regulations 2012
- Technical Regulator Guideline
 - Remote Communications Capabilities for Inverters
 - Declared Components of Electricity Infrastructure or an Electrical Installation Associated with an Electricity Generating Plant
 - Deemed Methodologies for Remote Disconnection and Reconnection of Electricity Generating Plants
 - Remote Updating Methods
 - Export Limiting Methods

4. Technical Requirements

This section specifies the technical requirements for LV EG systems, above 30kVA capacity, for both inverter energy systems (IES) and non-inverter energy systems.

All inverters connected to the grid at low voltage shall be compliant to AS/NZS4777.1 and AS/NZS4777.2.

4.1 Labelling and Signage

The installer of the EG system shall supply and install appropriate signage in accordance with the requirements outlined in SA Power Networks' [Service & installation Rules \(SIR\)](#).

Protection systems shall be clearly labelled as stated in the SIR.

4.2 Maximum System Capacity

The maximum generating system capacity shall be verified by SA Power Networks at the time of assessment. Where there is no constraint identified by SA Power Networks, the maximum aggregate system for a standard LV embedded generation connection is as per Table 1.

Table 1: Maximum System Capacity

LV EG IES Connection	LV EG non-IES Connection
1,500 kVA	1,500 kVA

SA Power Networks aggregates clusters of generating units on the same title or adjacent titles of land when they are owned or operated by customers that share an interest in the other generator, and / or the land, regardless of the number of NMIs or connection points. The technical requirements within this document apply to the total generating system's combined nameplate capacity of all aggregated generating units.

It should be acknowledged that there can be significant variation in network characteristics, plant thermal ratings and customer loads depending on location, and as such an accurate assignment of generating system capacity cannot be made without undertaking the appropriate network studies or calculations.

4.3 Generation Control

4.3.1 Export Limits at Connection Point

The EG system's export capacity to the distribution network will depend on many factors including:

- the network connection voltage;
- thermal and fault rating of network plant and equipment;
- characteristics of the network plant and equipment;
- proximity and capacity of adjoining loads and generating systems;
- the configuration and status of upstream distribution network assets; and
- generation capacity and type.

All generating systems which require remote monitoring and control as per section 4.13 must provide a control system with appropriate metering at the connection point to ensure the export limit for the site is not breached.

The connection point's dynamic net export limit is to be interpreted as a 'soft' limit that will cause the IES or non-IES to reduce its output, preventing ongoing export greater than the limit to suit the network conditions.

The export limit is to be interpreted by the customer as a maximum. The ability of the customer's LV EG system to export at the export limit is not guaranteed.

Depending on the capacity of the EG system, dynamic stability studies may be required to assess grid stability issues and identify the maximum generation capacity that can be dispatched under normal and contingency operating conditions.

4.3.2 Site Generation Limit Downstream of Connection Point

The site generation limit is considered to be the sum of the nameplate rating of all generators on site. This limit will be assessed by SA Power Networks at the time of the application and stipulated in the Engineering Report. Factors that are considered include:

- Market operations
- Existing asset ratings
- Existing power quality at the relevant network location
- Existing demand at peak generation
- Existing and forecast CER penetration at the relevant network location.

4.4 Inverter Energy System

Inverter Energy Systems (IES) connected to SA Power Networks' LV network shall comprise of inverters that are:

- tested by an authorised testing laboratory and be certified as being compliant with AS/NZS 4777.2 with an accreditation number;
- registered with CEC as approved grid connect inverter;
- tested by an authorised testing laboratory and be certified as being compliant with AS/NZS IEC 62116 for active anti-islanding protection as per AS/NZS 4777.2;
- installed in compliance with AS/NZS 4777.1;
- compliant to any particular testing requirements that may be outlined on AEMO's website at the time of the application to SA Power Networks; and
- remote disconnection and reconnection capable.

4.4.1 Electric Vehicle Supply Equipment

When electric vehicles which are connected via EV supply equipment capable of reverse power transfer with a flexible lead and plug to be used as an inverter system, the power connection shall conform with AS/NZS4777.1 and AS/NZS 4777.2. Reverse power transmission shall not be delivered by Mode 1 or Mode 2 EV supply equipment, it may be delivered by either Mode 3 or Mode 4 EV supply equipment as described in AS/NZS 3000 and IEC 61851-1.

4.4.2 Inverter Power Sharing Device (IPSD)

The IPSD shall not interfere with the safety, functional and performance of requirements for an IES conforming with AS/NZS 4777.1. It shall be installed in accordance with Clauses 3.6 of AS/NZS 4777.1.

Interface protection shall be installed for IPSD(s) with a connected aggregated inverter rated apparent power of greater than 30kVA.

The interface protection shall reference a single point that is located on the multiple electrical installation between the main switch (grid) for the multiple electrical installation and each electrical installation as part of that multiple electrical installation.

Where loss or isolation of a supply occurs for any electrical installation as part of multiple electrical installation that has supplementary supply from an IPSD, the supplementary supply to that electrical installation shall disconnect and isolate within 2s from that electrical installation.

4.4.3 Independent Supply IES

An independent supply inverter with an ac input port that can be connected to the grid, shall comply with AS/NZS 4777.2 Appendix M.

4.4.4 Like for Like Warranty Replacements

Like-for-like warranty replacement of an inverter will not be required to be compliant with SA Power Network's current Technical Standards UNLESS the capability exists within the replacement inverter. In this case the settings must be updated to the current standard, in particular the power quality response mode settings. Like-for-like warranty replacement will be defined as equipment with the same manufacturer and model.

Replacement inverters must still comply with all necessary safety standards and requirements.

Any changes made to an installation must be advised to SA Power Networks via an EG application, including any inverter replacements under warranty or an increase in panel capacity.

4.5 Energy Storage System (ESS)

Energy storage systems shall comply with the requirements specified within SA Power Networks' technical standards and Service and Installation Rules.

Inverter connected energy storage system which operates in parallel with the network shall use 'Multiple Mode Inverters' (MMI) that satisfy the requirements as prescribed in AS/NZS 4777.2. Inverters with battery storage ports are considered as MMI.

When an energy storage system has the ability to charge from the network, the proposed system may be subject to limits on the time and/or rate at which it may charge, and a constraint may also be applied on the amount and/or rate of energy discharged back into the network.

SA Power Networks will indicate those times when an energy storage system may or may not connect to and operate in parallel with the network through DERMS signalling. The DERMS signalling scheme is in addition to appropriate remote monitoring and control.

An ESS, such as a battery, which is not connected to the grid at low voltage via an AC input port but is connected behind an OTTS which is compliant to the Australian Standards is not considered grid connected.

4.6 Reactive and Active Power Control

4.6.1 Reactive Power Control

Without suitable controls, the connection of EG systems to the distribution network may adversely impact SA Power Networks' ability to satisfactorily regulate network voltages. For this reason, SA Power Networks requires EG systems to control reactive power output, within their capability, to maintain the connection point voltage to an agreed target or operate at an agreed power factor at the connection point such that voltage variations are maintained within prescribed limits.

All generating systems which require SCADA as per Section 4.13 shall be fitted with power factor controls to automatically control reactive power absorption or injection to assigned levels. SA Power Networks will have the ability to issue a power factor setpoint signal to the EG systems via a SCADA control interface and the sent-out generation reactive capacity must not deviate from this setpoint value.

The EG system may require additional sources of reactive power (e.g. STATCOMs, SVGs, reactors) or network augmentations to regulate network voltages within acceptable limits.

The final operating reactive power requirements for the EG system will be identified by the site-specific network studies and included within the engineering report.

4.6.1.1 *Reactive Power Control Requirements for sites with both Generation and Load*

Where a proposed generating system is connected to a connection point that also supplies electrical load, the reactive power control requirements at the connection point will be a combination of the supply and generation control requirements.

4.6.2 Active Power Control

To ensure control over the active power export to the distribution network, adequate control must be provided over the governor or primary energy source.

All generating systems which require SCADA as per Section 4.13 will be fitted with 'Generation Dispatch Limit' (GDL) and 'Net Export Limit' (NEL) controls to automatically control active power output as seen at the generating unit terminals and connection point respectively to assigned levels and maintain security and reliability of other customers' supply. SA Power Networks will issue a maximum GDL / NEL signal to the EG system via a SCADA control interface and the output of the generating system must be managed by the customer's system such that the active power generated at the generating unit terminals and exported to the network does not exceed these limits respectively.

Notwithstanding the requirements to install an operational GDL/NEL control scheme, any generating system connected to SA Power Networks' network shall have the capability of ramping up and down active power output at an agreed rate in response to an external signal.

Depending on the network connection location, SA Power Networks may also place restrictions on the ramping of active power production to support the management of network voltages and detailed studies may be required to assess the impact of dispatch with existing generation capacity.

4.7 Network Connection and Isolation

A network isolation device shall be installed in accordance with the requirement prescribed in SA Power Networks' SIR.

4.7.1 Back-up Supply Including Generators

Behind the meter IES or non-IES that are arranged to provide back-up supply only in the event of a loss of supply from the network may use a closed transition transfer switch (CTTS) to transfer supply from the network connection to these back-up generators and vice-versa upon restoration of grid supply. The CTTS installation shall be in accordance with the requirements stated in the SIR.

An EG system that is connected via a compliant CTTS must be registered with SA Power Networks. However, it may be installed without the need for SA Power Networks to undertake detailed network investigations or enter into a connection agreement for that generating system. EG systems will be subject to inspection by SA Power Networks to ensure compliance with the requirements stated in the SIR.

4.8 Earthing

The LV EG earthing shall comply with the SIR in addition to the requirements specified in AS/NZS 4777.1, AS/NZS 4777.2, AS/NZS 3000, AS/NZS 3010, AS/NZS 5033 and AS/NZS 5139.

4.9 Protection

The protection scheme shall be designed in accordance with the applicable regulations and this standard which require a protection system that detects all credible fault types.

Interface protection and instrument transformers shall comply with product standards as specified in AS/NZS 4777.1.

Protection design at the connection point shall be capable of achieving reliable discrimination of faults within the generating system installation and those on the network.

If required, the customer must provide adequate protection CT cores for protection systems and VT reference signals as required and specified by SA Power Networks. These must not be installed in sealed CT chambers.

All generating system protection systems shall be of failsafe design such that the affected generating units, or the entire generating system is disconnected from the network automatically should a protection element (and its backup system where applicable) fail.

Most of SA Power Networks' distribution lines and feeders are programmed for automatic re-closing within 2 to 5s after successful clearance of a line or feeder fault. Therefore, failure of the customer's equipment to rapidly disconnect during a SA Power Networks' loss of supply event may result in damage to the generating system's equipment or pose a health safety risk to the public and SA Power Networks' personnel.

4.9.1 Inverter Integrated Protection

Inverter integrated protection shall comply with AS/NZS 4777.2 for all inverters generating at LV.

No voltage stabilization devices are to be added in series with the IES circuit(s), see clause 3.2.2.1 in AS/NZS 4777.1.

4.9.1.1 Passive Anti-islanding Voltage and Frequency Limits

Passive anti-islanding settings for inverters connected at LV shall be set in accordance with, unless superseded by a site-specific setting specified in the Engineering Report.

Table 2: LV Inverter Passive Anti-islanding Voltage & Frequency Limit Values

Protective Function	Protective Function limit	Trip Delay Time	Maximum Disconnection Time
Under voltage 2 (V < <)	70 V	1 s	2 s
Under voltage 1 (V <)	180 V	10 s	11 s
Over voltage 1 (V >)	265 V	1 s	2 s
Over voltage 2 (V > >)	275 V	-	0.2 s
Under frequency 1 (f <)	47 Hz	1 s	2 s
Over frequency 1 (f >)	52 Hz	-	0.2 s

Passive anti- islanding settings for inverters connected at higher voltages shall be set in accordance with Table 3, unless superseded by a site-specific setting specified in the Engineering Report.

Table 3: LV Inverter Passive Anti-islanding Voltage as % & Frequency Limit Values

Protection Function	Protection Function limit	Trip Delay Time	Maximum Disconnection Time
Under Voltage 2 (V < <)	30% Nominal Voltage	1 s	2 s
Under Voltage 1 (V <)	78% Nominal Voltage	10 s	11 s
Over Voltage 1 (V >)	115% Nominal Voltage	1 s	2 s
Over Voltage 2 (V > >)	120% Nominal Voltage	-	0.2 s
Under frequency 1 (f <)	47Hz	1 s	2 s
Over frequency 1 (f >)	52Hz	-	0.2 s

Inverters must not connect or reconnect to the network unless the voltage and frequency of the network has been maintained for at least 60 seconds.

The inverter shall remain in continuous operation and operate, as required by Clauses 4.5.4, 4.5.5 and 4.5.6 AS/NZS 4777.2, for voltage and frequency variations with a duration shorter than the trip delay time specified in Table 2 and **Table 3**.

4.9.1.2 Active Anti-Islanding Protection

The inverter must include at least one method of active anti islanding protection, which will operate the disconnection device within two seconds after disruption to the power supply from the grid.

4.9.1.3 Voltage Ride Through

All inverters must comply with under voltage ride-through requirements stated in the Electricity (General) Regulations 2012 and AS/NZS 4777.2 designed to mitigate impacts on grid during disturbances.

4.9.2 Interface Protection

Table 4 below indicates the interface protection requirements for LV EG IES units and for LV EG non-IES units where installed. Interface protection is required for an IES or multiple IES with aggregated apparent power greater than 200kVA at a single connection point. Where interface protection is installed, it shall fulfil the following functions:

- a) Coordinate multiple IES installations for one point of supply on the grid.
- b) Provide protection for all inverters or IES installations using one device within one point of supply from the grid.
- c) Provide backup islanding protection to the connected grid.
- d) Be integrated in such a way that fails safe, and the IES does not generate while the interface protection is out of its service.
- e) Preserve the safety of personnel working on the grid and the general public.

However, some variations may apply for interface protection limits for:

- Inverter Power Sharing Devices (IPSD) as per Section 4.4.2;
- Electrical installations that are part of multiple electrical installations with a single grid supply (e.g. embedded networks);
- Alterations or additions to legacy systems; and
- Risk of overloading network assets.

Where the installation is a multiple electrical installation comprised of either multiple residential or commercial premises that are separately occupied or owned by different persons or corporate entities, such as retirement villages, townhouses, units, and a group of shops, interface protection is not required where:

- An IES is proposed to be connected to a separately occupied or owned portion of the electrical installation, and the IES does not exceed 200 kVA (where such IES capacity is approved in Engineering Report); and
- Each separately occupied or owned portion of the electrical installation has its own independent revenue metering arrangement in accordance with relevant rules.

NOTE: Each separate premises revenue metering arrangement may be an on-market or off-market metered connection point, and includes NMI, child NMI, child meter type, agreed calculation method or any combination of these in accordance with relevant AER metering rules and SA Power Networks requirements.

Table 4: Interface Protection Requirements

Protection Requirements	LV EG IES				LV EG Non-IES	
	≤200kVA		>200kVA			
	Exporting	Non-Exporting	Exporting	Non-Exporting	Exporting	Non-Exporting
Passive anti-islanding protection (27U/O, 59U/O, 81U/O, 81R)	-	-	✓	✓	✓	✓
Overcurrent facility fault, grid fault (50/51)	-	-	✓	✓	✓	✓
Directional power (32R or 32F)	-	-	-	✓	-	✓
Generator circuit Phase balance protection (46/47)	-	-	-	-	-	-
Inter-tripping	✗	✗	✗	✗	✓-	✗-

Symbols are used to denote protection requirements, where:

- ✓ Represents that the protection shall be required.
- Represents that the protection may be required.
- ✗ Represents that the protection shall not be required.

Anti-islanding protection schemes are required to operate within the reclose time of the applicable SA Power Networks’ protection device to protect the generating system from damage. The anti-islanding protection settings must be designed to ensure generator fault ride through capability for remote network faults and reliable operation for islanding events. Anti-islanding protection must not trip for fault ride through events unless agreed otherwise with SA Power Networks.

Non-IES shall not be reconnected to the network after the restoration of the grid supply without verification that normal conditions have been restored and a permissive signal is received from SA Power Network.

For IES, reconnection shall be in accordance with AS/NZS 4777. The Power Factor Protection function in interface protection relays should be disabled to avoid any potential nuisance tripping.

Table 5: Interface Protection protective functions and default set points

Protective Function	Protective Function Limit	Trip Delay Time	Maximum Disconnection Time
Over voltage (V >)	267 V	2.5 s	3 s
Under voltage 2 (V < <)	69 V	2.5 s	3 s
Under voltage 1 (V <)	179 V	11.5 s	12 s
Over frequency (F >)	52 Hz	1 s	1.5 s
Under frequency (F <)	47 Hz	2.5 s	3 s
Rate of change of frequency (df/dt)	±4 Hz/s	0.5 s	1 s

4.9.2.1 *Passive Anti-Islanding Protection*

4.9.2.1.1 *Voltage and frequency Limits – EG IES*

Where the generating system uses inverters that have internal under/over voltage protection and under/over frequency protection capabilities, the inverter protection may be used as the main protection with a single back-up protection scheme.

Under/over voltage and frequency protection must be installed to ensure the generating system is disconnected from the network when the system frequency varies outside the nominated range. The frequency protection settings must be based on the customer's proposed distribution network connection arrangement and operating requirements. Refer table 4.

4.9.2.1.2 *Rate of change of frequency limits – EG IES*

The inverter shall maintain continuous operation for frequency excursions with a rate of change of frequency (ROCOF) that do not exceed ± 4Hz/s for a duration of 250ms.

4.9.2.1.3 *Voltage and frequency Limits – EG Non-IES*

Under/Over voltage and frequency protection must be installed to monitor all three phases at the connection point. LV connected non-IES generating systems must disconnect from the network if the voltage (phase to earth) settings shown in Table 6 are exceeded.

Table 6: LV EG Non-IES Interface Protection Voltage & Frequency Limit Values

Protection Function	SETTING	DELAY (SEC)
Over Voltage (V >)	120% Nominal Voltage	2.0
Over Voltage (V > >)	125% Nominal Voltage	0.2
Under Voltage (V <)	80% Nominal Voltage	2.0
Under Voltage (V < <)	70% Nominal Voltage	0.4
Under Frequency (f <)	47 Hz	0.4
Over Frequency (f <)	52 Hz	0.4

4.9.2.1.4 *Rate of change of frequency limits – EG Non-IES*

The generating system shall maintain continuous operation for frequency excursions with a rate of change of frequency (ROCOF) that do not exceed ± 4Hz/s for a duration of 250ms.

4.9.2.2 Overcurrent Facility, Overcurrent Grid Fault and Earth Fault Protections

This protection must coordinate / discriminate with all relevant protection, including the distribution network protection and any other customers’ protection, and must include high speed protection (i.e. no intentional delay).

The overcurrent and fault protection shall be in accordance with the requirements stipulated in the SIR.

Earth fault protection for LV connections is not required, however are strongly recommended.

The embedded generating system's protection system must be capable of discriminating between a fault that is internal or external to the generating system.

4.9.2.3 Directional Power Protection

Table 7 indicates the directional power protection requirements for different embedded generation systems.

Table 7: Directional Power Protection Requirements

Protection Requirement	EG IES		EG Non -IES	
	Export Limited	Zero Export	Export Limited	Zero Export
Grid Reverse Power (32R)	-	-	✓	✗
Minimum Import (32F)	✗	✗	✗	✓

Symbols are used to denote protection requirements, where:

✓ Represents that the protection requirement shall be required.

- Represents that the protection may be required.

✗ Represents that the protection requirement shall not be required.

Grid Reverse Power Protection

Grid reverse power protection is required when the export of the generating system is to be limited to a nominated value (including zero export) to ensure that the exported power does not breach the agreed limit.

The grid reverse power protection scheme is in addition to other SA Power Networks’ generating system network protection requirements. This grid reverse power protection serves as a back-up in addition to control systems designed by the customer to limit export, e.g. PV cluster controllers.

Generating systems greater than 200kVA with a maximum export limit shall include grid reverse power protection to detect and prevent the inadvertent exceeding of the agreed export limit to the network. In highly constrained network areas, grid reverse power protection is also required for all generating systems that export.

Unless otherwise advised in the Engineering Report, two-stage grid reverse power protection is to be implemented as per the following:

1. Inverter Generating Systems
 - Stage 1 = 100% agreed export limit with 120s delay; and
 - Stage 2 = the lower of the 120% agreed export limit or the nameplate rating of the generating system with 0.4s delay
2. Rotating Generating Systems
 - Stage 1 = 100% agreed export limit with 2s delay; and
 - Stage 2 = 150% agreed export limit with 0.4s delay

3. Hybrid Generating Systems

SA Power Networks will advise the required settings within the Engineering Report

For zero export sites with only inverter generating systems, two-stage grid reverse power protection is to be implemented as per the following:

- Stage 1 = 5% of the nameplate rating of the generating system with 120s delay; and
- Stage 2 = 10% of the nameplate rating of the generating system with 0.4s delay

If the customer's installation is unable to perform two-stage grid reverse power protection, the more sensitive requirements of stage 1 & 2 are to be implemented (i.e. 100% with 0.4s delay).

The grid reverse power protection must include three-phase power monitoring relays installed at the connection point, or other agreed location, and electrically disconnect the generating system upon operation. Whenever the power export threshold is breached within the time delay specified above, the generating system must be automatically disconnected from the network using a current-breaking device. The grid reverse power protection circuit must be of fail-safe design.

When the generating system is transferring back to supply from the network following a blackout, the grid reverse power protection must be enabled in less than 1.5 seconds after closing the main CB.

Minimum Import Protection

Unless an inter-trip protection scheme is installed, all zero-export rotating generating systems must include minimum import protection (grid low forward power protection) to detect an islanding event and to prevent the inadvertent export of electricity into the distribution network. Unless otherwise advised in the Engineering Report the minimum import protection is to be implemented as follows:

- Rotating Generating Systems:
 - Stage 1 only = 10% of Agreed Maximum Demand with 0.4s delay
- Hybrid Generating Systems:
 - Settings to be advised in SA Power Networks' engineering report.

For both grid reverse protection and minimum import protection, the protection system shall be equipped with a separate set of CTs that operate independently from the CTs used for export control, ensuring redundancy and avoiding a single point of failure.

4.9.2.4 Seamless Transfer

Where a customer proposes to utilise minimum import protection and plans to return to SA Power Networks' supply with a seamless or 'bumpless' transfer, special consideration must be given to the minimum import protection arrangement. The generating systems shall not be reconnected to the network after the restoration of the grid supply without verification that normal conditions have been restored and a permission signal is received from SA Power Network.

Under this scenario, and if determined feasible by SA Power Networks, the minimum import protection may be temporarily inhibited for a short duration to allow the seamless transfer of the customer's facility to SA Power Networks' supply.

This temporary inhibit will ensure the generating system is able to be unloaded to a level that ensures correct operation of the uninhibited minimum import protection scheme.

Where SA Power Networks has agreed to allow a temporary inhibit of the minimum import protection, grid reverse power protection must be installed to detect and prevent islanding operation. The grid reverse power protection must be set as low as practical, considering the protection relay, CT accuracy and generating system synchronisation characteristics. In this instance, such protection will be set at 5% of the agreed connection point capacity with a 1s delay. The design of control systems will need to minimise reverse power flow immediately following synchronisation.

4.9.2.5 Phase Balance Protection

All LV EG connections may be required to have phase balance protection in place where the phase unbalance exceeds either 5kVA for sub-50kVA or 10% of the aggregate IES apparent power rating for inverter capacity greater than 50kVA

All Non-IES shall require both current unbalance and voltage unbalance protection.

In the case where a multiple-phase IES comprises of multiple mode inverters which are capable of charging energy storage via the grid-interactive port, the a.c. rated power input phase imbalance of all IES shall not exceed 5kVA between any phases.

Where phase balance protection is not inverter integrated according to AS/NZS 4777.2, phase balance protection shall be installed in accordance with AS/NZS 4777.1. and AS/NZS4777.2. An example of this is multiple single-phase micro inverters distributed across a three-phase electrical installation.

4.9.2.6 Inter-trip

Inter-trip protection is required for non-IES EG systems that are exporting. It may also be required where the combined generation capacity represents a significant portion of the total area load, the implementation of a minimum import protection scheme is not feasible or where it is deemed necessary by SA Power Networks. The inter-trip scheme is in addition to other EG system protection requirements.

Where an inter-trip protection scheme has been deemed necessary, a communication link between the EG system and the relevant SA Power Networks' substation shall be provided at the customer's expense. Depending on the location and connection voltage, SA Power Networks may require diversity or duplication of these communications links.

The inter-trip protection scheme shall be installed so that the EG system is disconnected from the network when the distribution network is de-energised.

The inter-trip communication links must be continuously monitored for integrity. In the event of a loss of the inter trip communications to SA Power Networks for more than 30 seconds or failure of the inter-trip protection, a 'permission denied' is to be carried out by the customer and a disconnection of the generating system from the Network is to be initiated by the Customer's PLC. SA Power Networks will not be responsible for any losses (direct or indirect) incurred by the customer.

It is the responsibility of the customer to trip the agreed circuit breaker/s within 0.4s of the inter-trip signal being sent.

The inter-trip signal from the interface panel to the agreed circuit breaker/s, including the communications link, must be of fail-safe design. Communications for protection signalling will be via a single set of either optic fibre or radio. The use of mobile phone networks for protection signalling communications will not be accepted.

The customer must also include tripping of the generating system if DC supply to the protection scheme is lost.

4.9.2.7 DC System or UPS Integration Protection

All protection systems installed as part of the EG system shall remain operational following a loss of mains supply from the network (e.g. have DC supplies (110 / 24V dc) of suitable capacity and survival time (24-hours)) whilst the generating system is connected to the network and be of failsafe design.

The generating system must be automatically disconnected from the network in the event of a failure of the DC supply or 'Uninterrupted Power Supply' (UPS) to the protection and control systems. In the event that there is a loss of DC supply to the protection and control system the generating system shall not be reconnected to the network until all relevant protection and control systems are suitably powered and ready for operation.

4.9.2.8 Fail-safe Tripping

The generating system is to automatically disconnect from the network in the event of the failure of any supplies or loss of communications to the protection equipment that would inhibit the correct operation of the protection equipment.

The customer must ensure that all the protection relays and control circuits remain operational in the event of circuit breaker failure or a of loss of supply from the network. The protection and control circuits must be a fail-safe design to ensure that the EG system is completely isolated upon loss of supply from the network and prior to depletion of any back-up systems (e.g. DC or UPS supply). Islanded system operation is not considered suitable in the event of a down-stream circuit breaker fail event.

The SCADA signal from the interface panel to the generating unit's circuit breakers, including the communications link, must be of fail-safe design.

4.9.3 Interlocking

Where customers are provided with alternative supplies from different sources within the network, these supplies shall be connected in such a way that they cannot be connected in parallel to ensure isolation between the relevant sources within the network. Refer to SA Power Networks' SIR for interlocking requirements.

4.9.4 Synchronisation

The generating system must ensure it is synchronised with the network before connection to the network. If one or more phases of the network are lost, then the generating system must disconnect from the network. To prevent non-synchronised connections, auto-synchronising and synchronisation check closing protection shall be installed across all CB's that could be closed out of synchronisation.

4.9.5 Additional requirements for LV EG Non-IES

All EG systems comprising of rotating machine EG must be compliant with AS 60034.1 and AS 60034.22.

4.10 Operating Voltage and Frequency

For LV IES where the inverter has a maximum voltage limit for sustained operations (based on averaged measurements over periods 10 minutes or less), this parameter must be set to 258V (phase to neutral).

All LV connected inverter shall have a nominal voltage of 400V (230V).

The customer must ensure that at all times during the operation of the proposed generating unit(s), the voltage levels within the installation are compatible with the installed electrical equipment.

4.11 Revenue Metering

Revenue metering is subject to Chapter 7 'Metering' of the NER and SA Power Networks' Service and Installation Rules and is in addition to the SCADA and remote monitoring requirements outlined in this technical standard.

4.12 Power Quality

4.12.1 Quality of Supply

The generating system must not impact on the quality of supply to SA Power Networks' distribution networks and their network users/customers. The generating system must comply with all applicable requirements of the NER, ESCOSA's license conditions, AS/NZS 61000 series and SA Power Networks' SIR, including but not limited to:

1. network voltage control;
2. voltage fluctuations;
3. ramp rate;
4. harmonics; and
5. voltage balance.

The sudden disconnection of EG system capacity should not produce network voltage changes that adversely impact on other network users and must be below levels specified by SA Power Networks.

As part of any application to connect, SA Power Networks will undertake the required network studies to determine compliance or otherwise based on assigned power quality of supply limits. The results of the studies, and any associated operational constraints will be advised within the engineering report.

4.12.1.1 Voltage Fluctuation and Flicker

The customer must ensure that voltage disturbances caused by the generating system, the overall electrical installation or by any appliances, do not result in voltage disturbances to other network users, greater than the limits prescribed in AS/NZS 61000, at the connection point.

4.12.1.2 Ramp Rate

The voltage changes from various loading / unloading rates and its resulting impact on the network voltage control systems form part of SA Power Networks' feasibility assessment. To ensure that there is no adverse impact on the network voltage control systems, the maximum allowable rate at which the generating units can be loaded and unloaded shall not exceed the following limits:

- Any inverter generating unit – 16.67% of rated power per minute, as per AS/NZS 4777.2 unless advised otherwise in engineering report
- Any rotating generating unit – typically maximum of 1,000kW per minute unless advised otherwise in engineering report

In addition, when carrying a controlled shut down of any generating system, the load on the generating system should be reduced to a minimum before opening any of the generating unit's circuit breakers.

All inverters shall have 'Soft Ramp Up after Connect or Reconnect Mode' as specified in AS/NZS 4777.2.

Compliance with these requirements must be able to be demonstrated and confirmed by commissioning tests.

4.12.1.3 Harmonics

The customer must ensure that the permissible harmonic limits associated with the electrical installation meet the requirements stated the S&IR.

4.12.1.4 Voltage Unbalance

The voltage unbalance at the point of common coupling caused by the customer's electrical installation shall operate within the limits prescribed in **Table 8** .

If voltage unbalance protection is required (i.e. non-IES systems) the protection shall be coordinated with and trip the generating units for voltage unbalance conditions greater than or equal to the values show.

Table 8: Generating System Voltage Unbalance Requirements

Voltage Unbalance Factor (%) for Three Phase Supplies	
Time Period	Voltage Unbalance Factor (%)
	LV Connection Point
30 minutes average	2.0
10 minutes average	2.5
1 minute average	3.0

4.12.2 LV EG IES Power Quality Response Modes

Unless the generating system is required to operate in fixed power factor control at the connection point, the customer must ensure the power quality response modes have been set in the inverters as per **Table 9** and **Table 10** below and must not be changed without written approval from SA Power Networks.

Generating systems required to operate in fixed power factor control at the connection point are only required to enable Volt-Watt response mode.

Table 9: Mandatory: Volt-VAR Response Mode for AS/NZS 4777 Compliant Inverters

Reference	Voltage (e.g. 230/400V)	VAr % Rated VA
Vv ₁	90% Nominal Voltage (207V)	44% leading (sourcing Vars, 3.4%/V)
Vv ₂	96% Nominal Voltage (220V)	0%
Vv ₃	104% Nominal Voltage (240V)	0%
Vv ₄	112% Nominal Voltage (258V)	60% lagging (sinking Vars, 3.3%/V)

Table 10: Mandatory: Volt-Watt Response Mode for AS/NZS 4777 Compliant Inverters

Reference	Voltage (e.g. 230/400V)	W % Rated VA
Vw ₁	110% Nominal Voltage (253V)	100%
Vw ₂	113% Nominal Voltage (260V)	20% (11.4%/V)

Table 11: Sustained Operation for Voltage Variations

Reference	Voltage
V _{nom-max}	258 Volts

The settings must be verifiable via visual inspection either on the inverter panel or software on device connected to the inverter.

Power quality response mode settings shall be the same for all the inverters at site.

Replacement inverters, including warranty replacements, shall be configured to operate with the required power quality response modes.

4.12.3 LV EG Non-IES Synchronous Power Quality

All synchronous LV EG Non-IES connections shall be designed and operated to adequately control active and reactive outpower through either of the following power quality response mode:

1. Voltage control mode, or
2. Fixed power factor mode that shall require achieving a power factor operating window at the connection point of typically 0.90 to 0.95 lagging and not leading unless otherwise agreed to or specified by SA Power Networks.

The power quality response mode and settings shall be determined depending on the outcomes of technical studies carried out by the customer to criteria specified by SA Power Networks and approved by SA Power Networks as part of the connection application process.

4.12.4 Volt-watt response for inverters with energy storage when charging.

The volt-watt response mode for charging of energy storage varies the maximum active power input of the inverter from the grid in response to the voltage at its grid-interactive port.

When energy storage charges from an inverter through the grid-interactive port, the maximum active power input of the inverter from the grid is varied in response to voltage at the grid-interactive port. This volt-watt response mode shall be enabled by default.

The response values are shown in below where P_{charge} refers to the power input level through the grid interactive port, and $P_{rated-ch}$ refers to the rated active power input through the grid-interactive port used for charging the energy storage.

Table 12 . Volt-watt response set-point values for multiple mode inverters with energy storage when charging

	Region Australia 'A' RValue	V_{W1-ch}	V_{W2-ch}
Set Point	Voltage	207 V	215 V
	$P_{charge}/P_{rated-ch}$	20%	100%

4.13 Communication Systems

To receive a flexible export limit, internet connectivity is required and to be provided by the customer. In the event this communication is not available or interrupted, the export limit must default to the fixed export limit. Remote monitoring and control may be required in cases where SA Power Networks identifies a credible network constraint, or otherwise deem it necessary. The communication system, including SCADA, shall be in compliance with [TS134 – Communication Systems \(inc SCADA\) for Embedded Generation](#).

4.14 Data and information

4.14.1 Static Data and Information

Static data requirements are outlined in Appendix D.

4.14.2 Dynamic Data and Information

Dynamic data shall be sent to SA Power Networks as outlined in section 4.13 Communication Systems.

4.15 Technical Studies

The technical studies, as outlined in **Table 13**, are required to be conducted by the customer or at the customer’s expense to enable connection to the distribution network. The technical studies will be verified by SA Power Networks to confirm settings and suitability for connection to the network within the parameters allowed with the Distribution Code.

Table 13: Technical Studies Required for LV EG Connections

Technical Studies	LV EG IES				LV EG Non-IES	
	≤200kVA		>200kVA		Exporting	Non-exporting
	Exporting	Non-exporting	Exporting	Non-exporting		
Voltage level (incl. power factor)	-	✘	✓	✘	✓	-
Voltage step change	-	-	✓	✓	✓	✓
Power flow	-	✘	✓	✘	✓	✘
Fault level	-	-	-	-	✓	✓
Protection grading	-	✘	✓	✘	✓	✓

Symbols are used to denote technical studies requirements, where:

- ✓ Represents that the technical studies shall be required
- Represents that the technical studies may be required
- ✘ Represents that the technical studies shall not be required

4.15.1 Modelling Data

SA Power Networks’ minimum information requirements for LV embedded generating system are available from our website. SA Power Networks reserves the right however, to request any additional information deemed reasonably necessary to perform the required network assessment.

4.15.2 Fault Levels

4.15.2.1 Generating System Fault Level Contributions

The connection of new EG systems increases the network fault level and may result in SA Power Networks’ equipment and the network user’s equipment operating beyond their safe limits.

Fault level contributions from any proposed generator installation must be determined at the design stage and SA Power Networks can provide source impedance data to assist customers.

Depending on the network connection location and voltage, the EG system may need to select appropriate generator, step-up transformer, and grounding options to mitigate potential fault level issues. Alternatively, fault mitigation equipment approved by SA Power Networks may be utilised by the customer to reduce fault level contributions.

Any additional short circuit fault current sources are to be accurately defined and carefully managed. The customer will bear any costs that SA Power Networks may incur in respect of applying or reviewing or approving any fault level control mitigation measures.

4.15.2.2 Specific Requirements for Areas of Constraint

The 11kV distribution network has areas that are approaching the maximum safe fault level of both the customers’ and SA Power Networks’ existing HV equipment. Unless very significant modifications are made to these areas, no additional short circuit fault sources can be connected to these parts of the network, this includes any rotating EG unit.

However, with appropriate protection and control equipment, SA Power Networks may permit the installation of such generating units within the Adelaide CBD where the:

1. Embedded generating units operate electrically islanded from the distribution network (and therefore do not contribute to the distribution network's short circuit fault current level). This includes generating units designed for island operation with momentary closed transition of the load between the distribution network and the embedded generating unit and vice versa.; or
2. Embedded generating systems designed to limit the fault contribution to the network to their full load current or near zero value. This may be achieved through the incorporation of:
 - (a) fault current limiting devices; or
 - (b) generating units connected via grid connected inverters, which limit the fault current contribution to their full load current or a near zero value.

It is important to note that these restrictions only apply to connections which impact the constrained areas of the 11kV distribution network.

4.15.2.3 SA Power Networks' Ultimate Network Fault Levels

Where the connection of any proposed generating system will cause the fault rating of any existing equipment to exceed the values stated in the SIR, augmentation may be required to raise the fault rating of SA Power Networks' equipment. Alternatively, the customer may elect to install fault current limiting equipment to enable connection of the proposed generating system to the network. The cost of either option will be borne by the customer.

5. Fees and Charges

Fees and associated charges applicable to customers are documented in SA Power Networks' [NICC270](#) and [Connections & Ancillary Network Services \(Manual No. 18\)](#).

6. Testing and Commissioning

The customer connecting to SA Power Networks' network has an obligation to permit and participate in the inspection, testing, and commissioning of the generating system.

The SA Power Networks project completion stage is comprised of three distinct parts:

1. Pre-connection off-line testing - customer testing to ensure the generating system is ready for connection to the network
2. Compliance testing - customer testing to demonstrate that the facility complies with SA Power Networks' technical requirements
3. Post connection or on-line commissioning - customer testing to demonstrate the generating system performs as agreed

6.1 SA Power Networks Site Visit Requirements

As part of the project's connection, SA Power Networks will attend site to witness the commissioning and compliance testing.

A connection compliance officer will attend the customer's connection to verify its compliance to the Service & Installation Rules. At this time, SA Power Networks' SCADA devices will be installed and connected to the installation.

Following verification to the SIR, SA Power Networks' representatives will attend site to witness the commissioning of the generating system to verify operation and compliance of the protection and control schemes with the requirements of this standard and the engineering report.

The compliance testing and post connection commissioning may be done on the same day. For this to happen, the following must occur:

- (a) this must have been nominated in the issued witnessing checklist; and
- (b) the commissioning officer must be satisfied that the pre-connection testing was completed successfully.

SA Power Networks' attendance at site or any subsequent visits will be at the customer's cost.

For generating systems requiring AEMO registration, AEMO are also entitled to witness the performance of any testing and will require typically a minimum of one-month advance notice to attend site. Any costs associated with AEMO attending site will be borne by the customer.

6.2 Commissioning Witnessing Requirements

SA Power Networks will provide a site-specific commissioning witnessing checklist, and the customer will need to confirm that the tests outlined in the commissioning witnessing checklist can be demonstrated during the on-site witnessing.

SA Power Networks will review the nature and relative timing of EG system commissioning tests with respect to the impact on other customers, coordination with other network outages and advise accordingly.

The commissioning witnessing checklist is to be divided into four (4) parts:

1. Site verification;
2. Inverter settings check;
3. Protection compliance testing; and
4. On-line demonstration.

6.3 Pre-Connection Commissioning Documentation

Pre-connection commissioning records for all tests undertaken must be kept by the customer.

Pre-connection off-line testing and commissioning is required to prove that the equipment that has been installed is operating correctly under test conditions. It also confirms the required functionality of each individual component prior to network connection and on-line demonstration and operation.

SA Power Networks is entitled to witness customer testing and commissioning of those parts of the generating system that may have direct impact on the network. This could include injection testing for incoming circuit breakers, earth grid testing or other generator control system testing.

SA Power Networks requires some of these commissioning records be submitted for review and acceptance. SA Power Networks will not attend site to complete the next phase of commissioning until the required documentation has been submitted.

The following commissioning documents must be submitted to SA Power Networks five clear business days prior to the date arranged with SA Power Networks to attend site. Documents showing compliance with all relevant Standards, including:

1. a copy of the Electrical Certificate of Compliance;
2. for IES, a copy of the commissioning records in line with AS/NZS 5033;
3. any other applicable off-line testing records, including earthing systems (as applicable);
4. serial numbers of all generating units, protection, and control devices; and
5. a compliance monitoring plan

In addition to the above, the following are required to be provided to SA Power Networks for generating systems greater than 500kVA:

1. Protection test results must be in the form of an original test report generated from the injection testing unit. Customers are to submit 5 business days before on-site witnessing. Test results must be approved prior to commencement of commissioning witnessing.
2. A written statement from a competent protection technician certifying that the system is installed as per engineering report and or connection offer, and protection settings applied are as agreed by SA Power Networks.

6.4 Protection Compliance Testing

Prior to connection of the generating system to the network, SA Power Networks is entitled to inspect and where necessary, require the customer to test those parts of the generating system that may have a direct adverse effect on the distribution network should they fail to operate as intended.

Compliance tests must be undertaken by suitably accredited parties having appropriate skills and competencies. All 'Injection Testing' should be performed by a competent protection technician. SA Power Networks' representatives may witness the compliance tests undertaken by the customer or their representative in accordance with their site specific commissioning witnessing checklist. SA Power Networks is not responsible for directing, leading, or performing any of the required tests.

The extent of compliance testing will vary depending on the generation capacity and connection configuration, and will include a combination of:

1. **Injection Testing:**

Simulation of system events by applying test signals to protection and control systems and confirming the correct response of the generator unit control system; and

2. **Controlled Testing:**

Controlled testing of the protection and control systems by manipulating relevant settings and confirming the correct response of the generating system circuit breakers or isolation facilities.

Table 14 provides an indication of the compliance tests that may be required for given protection and control elements. Where tests are nominated as required by both injection testing and controlled testing, compliance can be undertaken based on either test method or a combination of both. Injection testing are only applicable to installations above 500kVA and/or if controlled testing could not be performed.

Table 14: Protection and Control Compliance Test Requirements

Compliance Requirement	EG IES		EG Non-IES	
	Injection Test	Controlled Test	Injection Test	Controlled Test
Inhibits / Interlocks	✘	✓	✘	✓
Under/ Over frequency	✓	✓	✓	✓
Under/ Over voltage	✓	✓	✓	✓
ROCOF	✓	✘	✓	✘
Synchronisation	✘	-	✘	✓
Pole slip	✘	✘	✓	✘
Inter-tripping	✘	✘ (See Note 1)	✘	✓
Failsafe tripping	✘	✓	✘	✓
Directional power	✘	✓	✘	✓

Symbols are used to denote testing and commissioning requirements, where:

- ✓ Represents that the testing and commissioning shall be required
- Represents that the testing and commissioning may be required.
- ✘ Represents that the testing and commissioning shall not be required

Notes:

1. Inter-tripping will be required for exporting IES generating systems above 5MW and will involve a 'Controlled Testing'.

Please note that **Table 15** is intended as a guide only. The actual extent of pre-commissioning testing and commissioning will vary depending on the type, size, and connection location of the EG system and will be advised in the Engineering Report or in the issued commissioning witnessing checklist for your project.

Table 15: Testing and Commissioning Requirements for LV EG Connections

Testing and commissioning requirements	LV EG IES				LV EG Non-IES	
	≤200kW		>200kW		Exporting	Non-Exporting
	Exporting	Non-Exporting	Exporting	Non-Exporting		
Protection settings and performance	✓	✓	✓	✓	✓	✓
Power quality settings and performance	✓	✓	✓	✓	✓	✓
Export limit settings and performance	-	✓	✓	✓	✓	✓
Communications settings and performance	-	-	✓	-	✓	-
Shutdown & energisation procedures	✗	✗	-	-	✓	✓
Confirm system is as per specification	✓	✓	✓	✓	✓	✓
Confirm SLD is located on site	✓	✓	✓	✓	✓	✓

Symbols are used to denote technical studies requirements, where:

- ✓ Represents that the technical studies shall be required
- Represents that the technical studies may be required
- ✗ Represents that the technical studies shall not be required

Any deficiencies detected during the compliance tests must be resolved before making the final network connection. SA Power Networks will not connect an embedded generating system that is unsatisfactory for reliable connection to the distribution network. Any additional site visits by SA Power Networks to witness commissioning tests shall be at the expense of the customer.

6.5 On-Line Demonstration

On-line demonstration is required to confirm that the generating system performs as expected and that operation is consistent with the performance standards included in the connection offer or engineering report. The extent of on-line demonstration will vary depending on the type, size, and connection location of the proposed generating system.

The customer of the embedded generating system must keep a written record of all SA Power Networks' approved protection settings and test results. A copy of this record, together with a signed off witnessing checklist, shall be available at the connection point or as required by SA Power Networks and should not be altered without the prior written approval of SA Power Networks.

On-line demonstration is also required to confirm that the embedded generating system performs as expected and that operation is consistent with the assigned performance standards in the Connection Offer or engineering report.

Table 16 provides an indication of the on-line demonstration that may be required for given generating system.

Please note that **Table 16** is intended as a guide only. The actual extent of on-line demonstration will vary depending on the type, size and connection location of the embedded generating system and will be advised in the engineering report for your project.

For generating systems to be registered with AEMO, reference should be made to AEMO’s commissioning requirements.

Table 16: Indicative On-Line Demonstration Requirements

On-Line Commissioning	AS/NZS 4777 IES	Any Other Generating System
Synchronisation	✘	✔
Ramp rate	✔	✔
Export limiting	✔	✔
SCADA readings (if applicable)	✔	✔
Set point controls	✔	✔
Generation dispatch limiter	✔	✔
Power factor controller	✔	✔
Reactive power capability	✔	✔
Quality of supply	✔	✔
Permissive Signalling (if applicable)	✔	✔
Contingency FCAS (if applicable)	✔	✔

Symbols are used to denote testing and commissioning requirements, where:
 ✔ Represents that the testing and commissioning shall be required
 ✘ Represents that the testing and commissioning shall not be required

For generating systems greater than 500kVA, the customer must compile the commissioning test results in a commissioning report and submit this report to SA Power Networks for review within 20 business days of undertaking the tests. The commissioning report must confirm that all protection and control systems are functional, and their settings are consistent with information provided to and approved by SA Power Networks.

Any deficiencies detected during the on-line demonstration must be resolved in a timeframe to be agreed between the customer and SA Power Networks. SA Power Networks will not allow the ongoing connection of embedded generating system that has demonstrated unsatisfactory performance testing in order to maintain the integrity of the distribution network. Such disconnection may be made by SA Power Networks via permissive signalling where available.

For sites registered with AEMO, any non-compliances must be reported to AEMO via SA Power Networks together with a rectification plan as soon as possible, using the non-conformance template available from the AEMO website. The NER requires that any such non-conformances are rectified with 6 months.

6.6 Power Quality Monitoring

Logging of the quality of electricity generated is required to be undertaken by the customer, using measurement instruments meeting the specifications listed below.

The minimum period that the logging equipment must be installed is seven days, and this should include a period of at least two days where the generating system is not operating and at least five days where the generating system is in full operation as approved in the Engineering Report. In cases where potential for power quality issues have been identified as part of the network studies, the logging period required may be greater than one week, and the time periods will be advised as part of the engineering report.

10-minute aggregated readings are required, and the complete power quality logging data is to be provided to SA Power Networks in Microsoft Excel (or .csv) format, as an accompaniment to the

commissioning report. Please provide in the format below with an additional 50 columns for the individual harmonics and multiplied by 3 for each phase reading.

Timestamp	Voltage	Current	kW	kVAr	kVA	PF	Frequency	THDV%	Harmonic V% 1-50 ¹	Flicker Pst	Flicker Plt
-----------	---------	---------	----	------	-----	----	-----------	-------	----------------------------------	----------------	----------------

Table 17 details the specifications for the power quality measurement instruments and event recording.

Table 17: Power Quality Measurement Requirements

Attribute	Relevant Standard or Specification
Methods for measurement and interpretation of results	AS/NZS 61000.4.30
Class of measurement	Class A
Voltage, Amps, Freq, Power Factor, kV, kVA, kVAR	AS/NZS 61000.4.30
Sample rate	AS/NZS 61000.4.7
Total harmonic distortion & harmonics	AS/NZS 61000.4.7
Flicker (Pst and Plt)	AS/NZS 61000.4.15 (10min Pst & 2hr Plt)
Voltage and current unbalance	AS/NZS 61000.4.30
High speed event recording	Voltage, current and transient trigger enabled
RMS and waveform snapshots	Enabled

7. Operations and Maintenance

7.1 Joint Operating Protocols

Joint operating protocols are required for systems with SCADA to ensure coordinated management of the operation and dispatch of generation capacity. The joint operating protocols will be developed in conjunction with the customer.

The requirement for a joint operating protocol will be determined post acceptance of the connection offer for your project, however, in general the following types of generating system will require the development of a joint operating protocol:

1. export generating non-IES (e.g. rotating generators);
2. IES exporting greater than 200kW;
3. SCADA controlled generating systems (i.e permission granted/denied); and
4. GDL/NEL/NIL and power factor set point controlled generating system.

The principles within the joint operating protocol will include, but not be limited to:

1. the customer should inform SA Power Networks’ NOC prior to the connection and disconnection of any generator to the network;
2. an authorised representative of the EG system must be available always when the generating plant is operating to receive communications and directions from the SA Power Networks’ NOC so that emergencies can be addressed, and dispatch limits applied if required; and
3. the customer will ensure that appropriately trained operators are available as required, consistent with the operating protocol.

These protocols will be revised at regular intervals or as required considering any changes in system operating conditions, generation dispatch arrangements or contact detail changes. It is the

¹ Subject to equipment limitation, provision up to 15th harmonic may be permissible.

responsibility of the customer to advise SA Power Networks should any contact details change and ensure the joint operation protocol is permanently up to date/valid.

7.2 Operating Procedures

The customer must develop its internal operating procedures to cover the initial connection to the network, pre-commissioning, and commissioning of the generating system as well as its ongoing operation and maintenance activities associated with the connection.

Prior to completion of the project, operational procedures must have been developed and adopted for the day-to-day operation of the installation. These procedures must complement the joint operating protocols to be developed. Similarly, visibility of the generating system must be available to SA Power Networks' NOC via SCADA.

The protocols and procedures shall set out the operating interfaces between SA Power Networks' NOC and the customer, having regard to the safe and efficient operation of the network in compliance with the NER and ESCOSA's Electricity Distribution Code.

The operating procedures will be designed to protect the network and to maximise the customer's access to and use of the network within the agreed limits. The operating procedures will need to include, amongst other things:

1. details of the operating procedures and nomenclature standards to be adopted in relation to the interface between SA Power Networks' NOC and the customer's generating system;
2. details of the procedures to be adopted by both parties in relation to the NOC oversight, monitoring, control, and operation of the network and generating system access;
3. contact details for both parties' authorised persons available on 24 hours, seven days a week basis; and
4. permission to connect / denied procedures.

The agreed operating procedures once developed, will need to consider the existing operating procedures used by SA Power Networks' NOC for the operation of the entire network.

The operating procedures must be considered as an active document in so far as the procedures may need to be reviewed and revised from time to time as both technology and circumstances require.

The onus of ensuring the operating conditions is up to date rests with customer. If SA Power Networks attempts to contact the nominated contacts contained within the job and it is unable to do so, SA Power Networks reserves the right to issue a 'permission denied' signal or disconnect the generating system from the network without notice, to manage the network at any time.

7.2.1 Additional Operating Protocol Requirements for Inter-trip Interface Signals

When inter-trip interface signals are a requirement, SA Power Networks in consultation with the customer will develop and agree on the proposed operating protocols prior to commissioning of the generating system.

The operating protocols will generally address the following:

1. SA Power Networks / customer's asset interface definition;
2. SA Power Networks / customer's liaison responsibility and communication;
3. Both parties' obligations & operations under emergency and fault conditions;
4. Maintenance and access arrangements; and
5. Plant capability and limitations.

SA Power Networks will provide to the customer its model operating protocols document for export generating systems for modification and submission by the customer.

7.3 Compliance Monitoring and Maintenance

The obligation of ensuring compliance with any generator performance standards resides with the customer and will require ongoing demonstration of compliance with SA Power Networks' requirements and appropriate standards and regulations under the National Electricity Rules.

The customer must adequately maintain the protection and control systems of the generating system and any other service provided by the customer in relation to the generating systems that impacts on the individual generating unit, its safety or operation, or the safety or operation of the distribution network.

The customer will ensure that the overall electrical installation and generating system is maintained in accordance with good electricity industry practice and will not create a hazard or cause interference with the SA Power Networks' distribution system. The customer must arrange for periodic testing of the protection system to ensure it continues to function as designed and commissioned.

The customer must develop and submit to SA Power Networks a compliance monitoring program for review at least 5 business days prior to the date of commissioning and connection of the generating system to the network.

The compliance monitoring program shall include:

- Proposed methods and test procedures by which the Customer can demonstrate ongoing compliance of the Generating System with the Engineering Report; and
- Proposed periodic testing times to confirm ongoing compliance with each applicable requirement in the Engineering Report. The frequency of testing shall be once every three years, or after any internal disturbance event and any plant change at the customer's site. This is subject to change upon review by SA Power Networks.

The customer will make available a copy of the agreed compliance monitoring program to SA Power Networks within three months of initial connection to the network and any resultant test results as and when required by the agreed compliance monitoring program. The cost of such compliance testing and maintenance shall be borne by the customer.

Failure to provide a compliance monitoring program, or adhere to its requirements, SA Power Networks reserves the right to issue a 'permission denied' signal preventing operation of the generating system until an appropriate program is in place. SA Power Networks will not be liable for any losses (direct or indirect) incurred by the customer in issuing any such permissive signalling.

7.3.1 Frequency of Testing

The compliance program must include the frequency and the testing methods at which the tests will be undertaken to prove ongoing compliance with the applicable performance standards or requirements in the engineering report.

The actual frequency of testing should take into consideration all relevant factors including:

- the technology of the plant;
- experience with the particular generation technology;
- manufacturer's advice with respect to maintenance of the particular generating unit/ model; and
- the level of maintenance required to provide reasonable assurance of compliance.

For most performance standards or requirement in the engineering report, the tests undertaken shall include, but not limited to:

- all protection systems (circuit breakers, relays, trip signals, generating system protection and DC supply);
- reactive power capability;

- active power control;
- voltage and reactive power control;
- quality of electricity generated;
- response to disturbances (frequency, voltage, contingency events); and
- power station auxiliary transformers/supplies; and Fault level/current mitigation devices.

The minimum frequency of testing is:

- Every 3 years;
- After any plant change; and / or
- After any disturbance event.

For communications equipment (comms links including backup), remote monitoring capability (SCADA) and UPS systems, the frequency of testing is:

- Annually;
- After any equipment change; and / or
- After any disturbance event.

7.4 Notice of Alteration to Approved Installation

The IES generator/customer must not significantly alter, add or replace components of the approved design or protection settings of the IES generation installation without the prior written consent of SA Power Networks. The approved design is to be the design of the plant as covered by the network studies and/or included within the connection contract. Where failure of an item of plant occurs, this may be replaced with a direct equivalent subject to approval from SA Power Networks.

SA Power Networks may reattend site to witness commissioning and compliance testing if

- the replacement of these inverters accumulates to more than three (3) units or
- the replacement of these inverters is equivalent to more than 10% of the IES or
- any Interface Protection Unit (IPU) has been replaced.

If at any time the IES generator/customer wishes to propose an increase in the agreed nameplate capacity of the IES generation installation, the IES generator/customer must request the increase in writing to SA Power Networks.

Upon receipt of the written request, SA Power Networks will advise the IES generator/customer if it is necessary for SA Power Networks to undertake a new network analysis (at the IES generator/customer's cost) to ascertain the operational constraints of the IES generation installation with the proposed changes to the installation and/or protection settings.

Appendices

A. Deviations from the National DER Connection Guidelines

Section	Description of deviation	Type of deviation	Justification
2.3	Subcategories section not included.	Administrative	To improve readability
3	SAPN documents included	Administrative	Identification of documents applicable to SAPN
4.2	Addition of cluster requirements	Improvement	Network stability
4.3.2	Site generation limit defined	Administrative	Improve understanding
4.5	Addition of section 'Energy Storage Systems'	Improvement	SAPN requirement
4.6	Reactive and Active Power Control section added	Network Stability	SAPN requirement
4.7	Title changed from 'Network Isolation' to 'Network Connection and Isolation'	Administrative	Clearer title on section information
4.7.1	CTTS section added	Improvement	SAPN requirement
4.9.1	Inverter settings included	Improvement	To improve readability
4.9.2	Title changed from 'Grid Reverse Power Protection or Grid Low Forward Power Protection' to 'Directional Power Protection'	Administrative	Clearer Title
4.9.2	Minimum Import Protection section added	Administrative	To improve readability
4.9.2	Seamless Transfer section added	Administrative	To improve readability
4.9.6	Feeder/Line Protection section added	Improvement	SAPN requirement
4.9.7	Protection Labelling section added	Improvement	SAPN requirement
4.11	Title changed from 'Metering' to 'Revenue Metering'	Improvement	Clearer Title
4.13	Communication details included in separate document	Administrative	To improve readability

B. Typical LV Connection Arrangement

LV CONNECTION (>200kVA)

Diagram shows the basic hierarchy and protection/control elements of an embedded generation connection - not all AS/NZS3000 requirements have been shown.

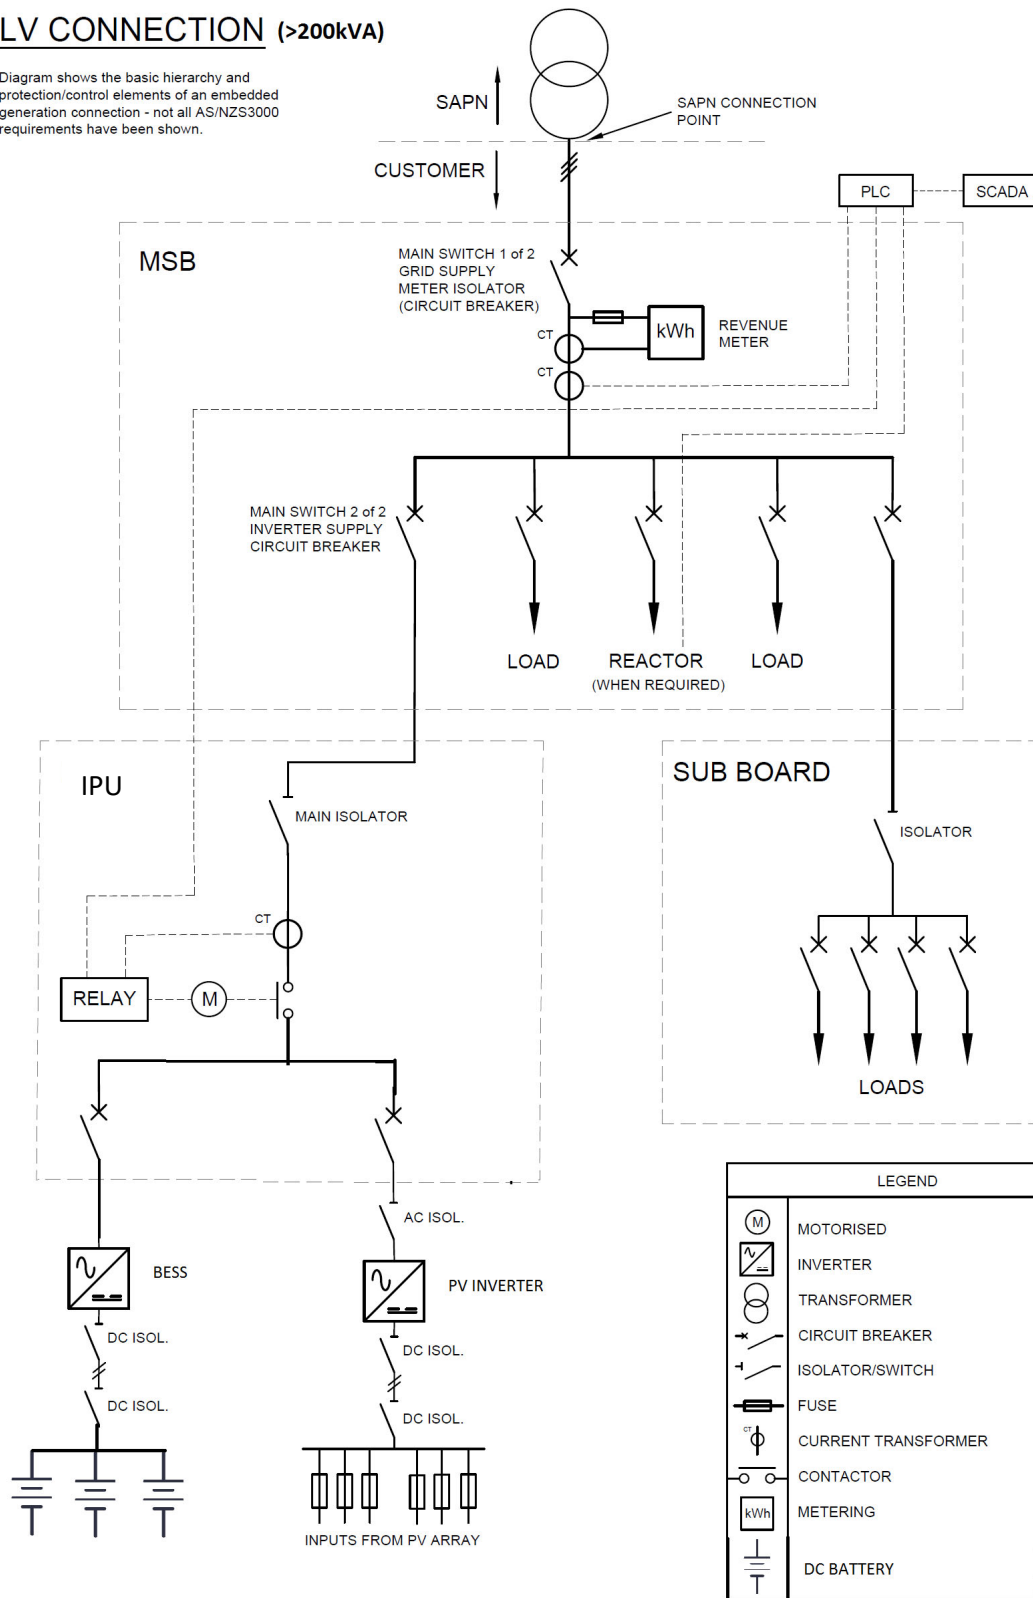


Figure 1: SLD Typical LV Connection Greater than 200kVA

C. Model Connection Agreement

Details on the process of obtaining a model connection agreement is outlined in SA Power Networks' [NICC270 - Connection of Medium and Large Embedded Generation](#)

D. Static Data and information

Static data that is required to be provided by the customer to the DNSP as per the AEMO DER Register Information Guidelines, and as a minimum this includes the following categories of data:

1. DER Installation at an NMI in aggregate:
 - (a) NMI
 - (b) Approved capacity
 - (c) Installer identification
 - (d) Connection agreement 'Job number' (provided by SA Power Networks)
 - (e) Number of phases available; Number of phases with DER installed
 - (f) Interface protection and control
 - (g) Islandable installation
 - (h) Protection and control modes
2. AC grid connection of a DER installation:
 - (a) Number of AC connections
 - (b) AC equipment type
 - (c) Inverter/small generating unit manufacturer
 - (d) Inverter series; Inverter model number
 - (e) Inverter serial number
 - (f) Commissioning date
 - (g) Status of inverter (active, inactive, or decommissioned)
 - (h) Inverter device capacity (kVA)
 - (i) What standards apply to the inverter
 - (j) Sustained overvoltage (V)
 - (k) Over-frequency (Hz); Under-frequency (Hz)
 - (l) Inverter – demand response enabled device interaction
 - (m) Inverter power quality response mode – volt-watt (where enabled)
 - (n) Inverter power quality response mode – volt-var (where enabled)
 - (o) Inverter power quality response mode – reactive power mode (where enabled)
 - (p) Inverter power quality response mode – fixed power factor mode (where enabled)
 - (q) Inverter power quality response mode – power factor curve/power response mode (where enabled)
 - (r) Inverter power quality response mode – power rate limit mode (where enabled)
 - (s) Non-inverter generator – voltage/reactive power regulation
 - (t) Non-inverter generator ramp rate (where enabled)
 - (u) Non-inverter generator frequency response mode (where enabled)
 - (v) Protection and control modes (ie ROCOF, vector shift, inter-trip, neutral voltage displacement)
3. DER energy sources:
 - (a) Number of devices
 - (b) Manufacturer
 - (c) Model number
 - (d) Status
 - (e) Device type
 - (f) Nominal rated capacity (kVA)
 - (g) Nominal storage capacity (kWh)